


RD312 Buried Metal Cover Locator Technical Specification

Description	Precision metal cover locator
Part No.	10/RD312
Physical	
Construction	Head/Housing: High impact ABS mid grey plastic for mechanical strength. Stem: 22 mm aluminium tube. Weatherproof to NEMA 3R and IP54.
Ruggedness	Withstands 1 m (3 ft) drops onto concrete.
Dimensions	78 x 25 x 10 cm (28 x 10 x 4 in).
Shipping Box Size	79 x 26 x 14 cm (31 x 10.2 x 5.5 in).
Weight	1 kg (2.2 lb).
Shipping Weight	2 kg (4.4 lb).

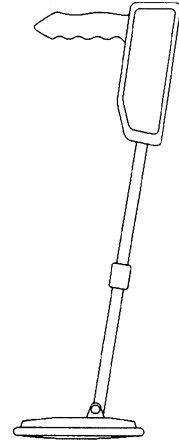

Operating Modes

Description	Mode
Green button	'On'/sensitivity/reset
Red button	'Off'

Locate Range

Absolute limits of location range cannot be accurately specified. As a guide the RD312 will detect buried metal covers to the following depths:

Description	Size	Depth
Manhole cover	63 cm (25 in)	To 76 cm (30 in)
Valve box	15 cm (6 in)	To 41 cm (16 in)
Plastic valve box (locatable)	10 cm (4 in)	To 20 cm (8 in)

Audio Indication

Varying pitch tone from loudspeaker. Highest pitch indicates maximum response over target. The use of optional headphones disables the weatherproof loudspeaker. Audio battery 'OK' indication.

Gain Control

Maximum at switch on, can be reduced by the operator. Auto Gain Reset feature.

Batteries

1 x 6LR61 (9 V) alkaline. 30 hours life, nominal @ 20°C (68°F) continuous use. Rechargeable option (information available).

Operating

Temperature Range -15°C to +50°C (5°F to +122°F).



Miscellaneous

Options Summer Headphones, Winter Headphones, Padded Nylon Carry Bag
Quality Control BS5750/ISO 9001/EN29001.
Warranty 12 months.

Radiodetection Ltd
Western Drive
Bristol, UK, BS14OAZ
Tel +44 117 976 7776
Fax +44 117 976 7775
<http://www.radiodetection.co.uk/>

Radiodetection Corp
35 Whitney Road,
Mahwah, NJ USA 07430
Tel +1 201 848 8070
Fax +1 201 848 1303



Radiodetection

A United Dominion Company

Radiodetection products are under continuous development and are subject to change without notice. Rd312mcl.pdf